

HDMI to Composite/S-Video Converter

User Manual

Thanks for taking our product. Please read this manual carefully before application.


I. Introduction

This converter box is designed to convert HDMI to either Composite Video or S-Video. It allows the devices only equipped HDMI output to be connected to analog TV. It is mostly applied in AV equipment testing.

II. Features

- 1.Input HDMI Resolution: 480p (60Hz), 576P (50Hz), 720p (50Hz / 60Hz), 1080i (50Hz / 60Hz), 1080p (50Hz / 60Hz);
 - 2.Output Signal: Composite Video (1.0Vpp), S-Video(Y:1.0Vpp, C:0.3Vpp);
 - 3.Output Video Systems: PAL/NTSC;
 - 4.Output Video Impedance: 75Ω;
 - 5.Compatible with HDMI 1.3 and HDCP;
 - 6.Power Supply: DC 5V;
 - 7.Working Temperature: -25°C ~ 75°C;
 - 8.Working Humidity: 10%-60%;
- Product Dimension: 118*84*28mm (L*W*H) ;

III. Interface Specification

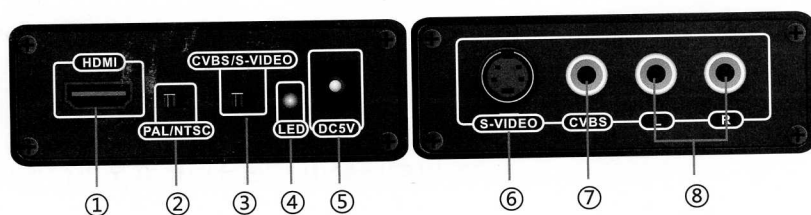


- ①HDMI In: To connect HDMI device sources
- ②PAL/NTSC Switch: select PAL or NTSC
- ③CVBS/S-Video Switch: Select Composite Video or S-Video as output
- ④LED: Power indicator
- ⑤DC 5V: To connect DC 5V power supply
- ⑥S-Video Out: S-Video output
- ⑦CVBS Out: Composite Video output
- ⑧L/R: Audio L/R output

IV. Accessories

Item	Qty (pcs)	Remark
Power Supply	1	DC 5V
AV Cable	1	1.5 meters
S-Video Cable	1	1.5 meters
User Manual	1	

V. Connection Image

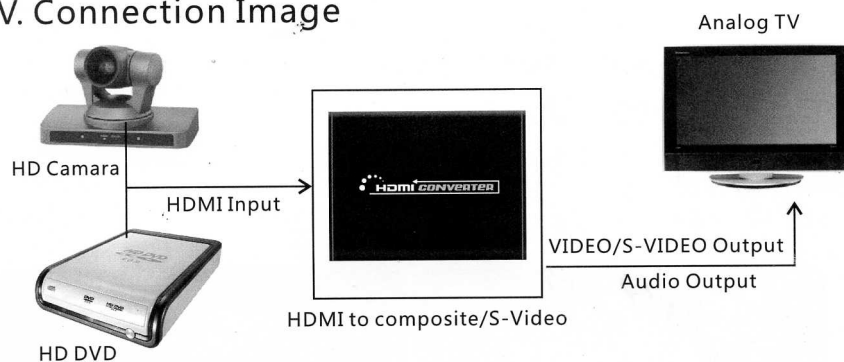

Note: This product doesn't support simultaneous output of Composite Video and S-Video. Please select either one of them by switch button on the unit.