


# MOUNTING INSTRUCTIONS FOR RG6 / RG59 CX3

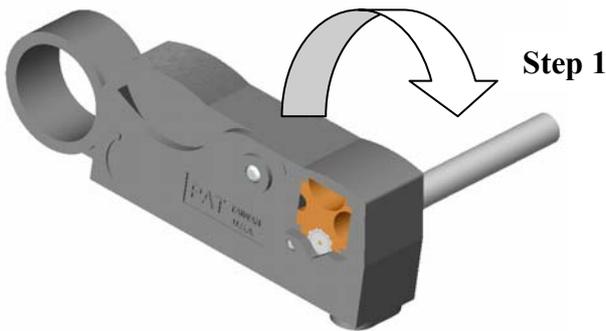


Step 1

## Step 1.

We strongly recommend the use of Corning Cabelcon's pre-adjusted Rotary Cable Stripper for proper preparation of the cable.

Please read the instructions for use, supplied with the tool.

Stripping dimensions  
A = 6.5 mm. B = 6.5 mm.

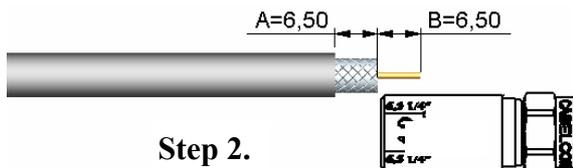


Step 2.

You can use the cutting guide on the connector body to check for proper stripping dimensions.

Do not cut the braid or mark center conductor.

## Step 2.


Fold exposed braid back over jacket. For "Quad shield", "Tri shield" and "Super shield" cables: Remove the outer braid and foil only. Fold back the inner braid. Leave the inner foil attached to dielectric. Make sure, that the foil is undamaged and smooth.

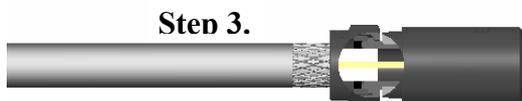

Step 3.

## Step 3.


Press the front part of the connector (with the built-in "tool") against the cable and turn slowly to prepare the foil to enter into the connector.

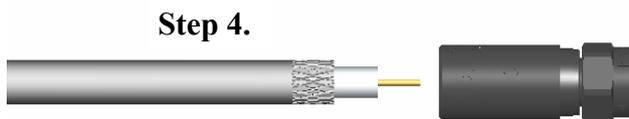


Step 4.

## Step 4.

Push the connector over the foil and allow the support mandrel to slide between the foil and braid.

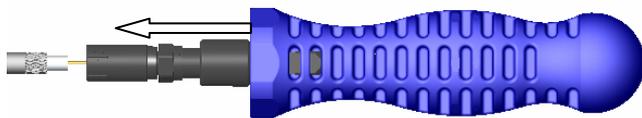

A mounting tool for F connector and a rubber tool for cable support can be used to keep a better grip on the connector and cable during installation [F]. Press and turn until the dielectric is flush with the support mandrel face [G].

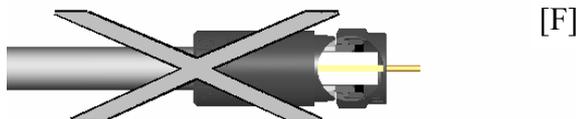

[F]

## Step 5.


Compress the connector using the proper Compression tool.



[G]

## Step 6.

Mount the connector into the tap. Please make sure to tighten the nut with a torque of 4,5 Nm to ensure optimal performance of your network.

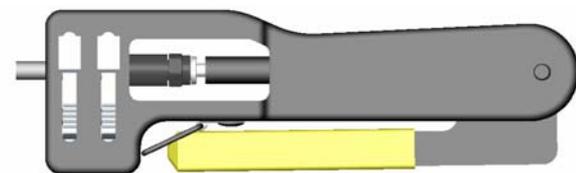

Step 5.



Step 6.

Recommended tools	Item no.
Rubber tool for cable support	98028785
Tool for security shield ø.20mm	98028794
Security shield ø.20mm	98028795
Installation tool for F connectors	98028798
Mounting tool for F connectors	98028805
Compression tool CAT-AS-IEC/F-FX	98029057
Torque Wrench AH (angle head) HEX 11mm – Torque 4,5 Nm	98029080
Cable stripper rotary RG 6/59	98501010

ISO 9001 certified

Distributor:

**CABELCON**  
connectors

Corning Cabelcon A/S, Industriparken 10, DK 4760 Vordingborg  
Tel: +45 55 98 55 99 · Fax: + 45 55 98 55 04  
E-mail: cabelcon@cabelcon.dk · www.cabelcon.dk